



# STANDARD RESPONSE AUTOMATIC SPRINKLERS GL SERIES DRY TYPE PENDENT

## DESCRIPTION AND OPERATION

The Globe GL Series Dry Type Pendent Sprinkler is designed for use in special applications such as freezing environments and conditions where sediment or foreign materials might accumulate in ordinary drop nipples.

The Globe GL Series Dry Type Pendent Sprinkler utilizes a frangible glass ampule sprinkler. At the ampule's rated temperature, the sprinkler opens releasing the bulb seat, causing the inner tube assembly to move, allowing spring assembly to pivot alongside the inner tube. At this time, water flows through the sprinkler and is distributed by the deflector, in an approved discharge pattern.

The heart of Globe's GL Series sprinkler proven actuating assembly is a hermetically sealed frangible glass ampule that contains a precisely measured amount of fluid. When heat is absorbed, the liquid within the bulb expands increasing the internal pressure. At the prescribed temperature the internal pressure within the ampule exceeds the strength of the glass causing the glass to shatter. This results in water discharge which is distributed in an approved pattern.



**SURFACE MOUNT**



**SLEEVE & SKIRT**



**EXTENDED**



**RECESSED**

## TECHNICAL DATA

- See reverse side for Approvals and Specifications.
- Temperature Ratings -  
135°F (57°C), 155°F (68°C), 175°F (79°C)  
200°F (93°C), 286°F (141°C)
- Water Working Pressure Rating - 175 psi (12 Bars)
- Factory tested hydrostatically to 500 psi (34 Bars)
- Maximum low temperature glass bulb rating is -67°F (-55°C)
- Frame - bronze • Deflector - brass • Screw - brass
- Bulb Seat - brass • Spring - nickel alloy • Seal - teflon
- Retainer - brass • Pin - stainless steel
- Torsion Spring - stainless steel • Orifice Insert - brass
- Bulb - glass with glycerin solution, 5mm size
- 3/4"NPT or 1"NPT • Outer Tube - galvanized steel pipe • Inner Tube - stainless steel

## • SPRINKLER TEMPERATURE RATING/CLASSIFICATION and COLOR CODING

CLASSIFICATION	AVAILABLE SPRINKLER TEMPERATURES		BULB COLOR	N.F.P.A. MAXIMUM CEILING TEMPERATURE	
ORDINARY	135°F/155°F	57°C/68°C	ORANGE/RED	100°F	38°C
INTERMEDIATE	175°F/200°F	79°C/93°C	YELLOW/GREEN	150°F	66°C
HIGH	286°F	141°C	BLUE	225°F	107°C

# STANDARD RESPONSE AUTOMATIC SPRINKLERS GL SERIES DRY TYPE PENDENT

## SPECIFICATIONS

SIN MODEL	NOMINAL "K" FACTOR	THREAD SIZE	LENGTH	FINISHES
GL5679	5.6 (80 metric)	1"NPT	cULus Variable to 48" FM Variable to 36"	Factory Bronze Chrome White Polyester <sup>2</sup> Black Polyester <sup>1,2</sup>
GL5680	5.6 (80 metric)	3/4"NPT		
GL8179	8.0 (115 metric)	1"NPT		

NOTE: METRIC CONVERSIONS ARE APPROXIMATE.

<sup>1</sup>FINISHES AVAILABLE ON SPECIAL ORDER.

<sup>2</sup>cULus LISTED CORROSION RESISTANT WHEN SPECIFIED ON ORDER.

## APPROVALS

STYLE	SIN MODEL	HAZARD <sup>1</sup>	135°F (57°C)	155°F (68°C)	175°F (79°C)	200°F (93°C)	286°F (141°C)	*FM	cULus	NYC-DOB MEA 101-92-E	MIN. DISTANCE BETWEEN SPRINKLERS Feet (Meters)
Pendent	GL5679	ALL	X	X	X	X	X	X	X	X	6 (1.8)
Recessed	GL5680	ALL	X	X	X	X	X	---	X	X	
Pendent	GL8179	ALL	X	X	X	X	X	---	X	X	


<sup>1</sup>SPRINKLERS SHALL BE LIMITED AS PER THE REQUIREMENTS OF NFPA13 AND ANY OTHER RELATED DOCUMENTS.

\*PENDENT STYLE - FM APPROVED 155°F (68°C), 200°F (93°C), AND 286°F (141°C)

\*RECESSED PENDENT STYLE - FM APPROVED 155°F (68°C) AND 200°F (93°C)

ALL: ALL HAZARDS

## CROSS SECTIONS

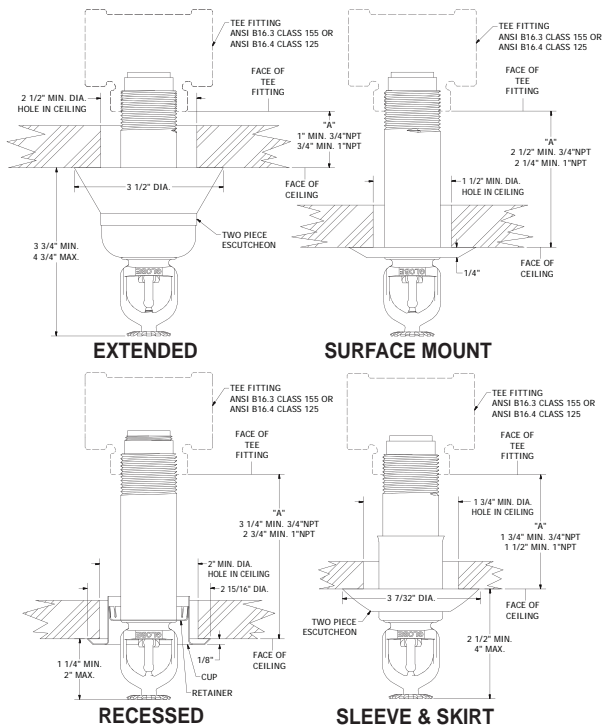

## IMPORTANT INSTALLATION DATA

Globe GL Series Dry Pendent Sprinklers should be installed in accordance with the requirements set forth in NFPA 13. These sprinklers are to be installed using a pipe wrench applied to the outer tube. When this is not possible, the proper sprinkler head wrench may be used with extreme care for lengths up to approximately 18". Excessive force may distort the frame thus destroying the unit.

When installed in a wet system extending into a freezing area see chart on Dry Caution Sheet for minimum exposed barrel length to prevent ice plugs. Please refer to our Dry Caution Sheet for further important installation data.

## ORDERING INFORMATION SPECIFY

- Quantity • Model Number • Style • Orifice • Temperature • Finishes
- Quantity - Wrenches - P/N 333010
- Quantity Recessed Wrenches - P/N 337014
- Escutcheons Desired
- Quantity - Protective Caps - P/N 327109-cap (Friction Fit Recessed)

"A" Dimension - Distance from face of fitting to the finished ceiling line regardless of escutcheon used.

## GLOBE® PRODUCT WARRANTY

Globe agrees to repair or replace any of its own manufactured products found to be defective in material or workmanship for a period of one year from date of shipment.

For specific details of our warranty please refer to Price List Terms and Conditions of Sale (Our Price List).